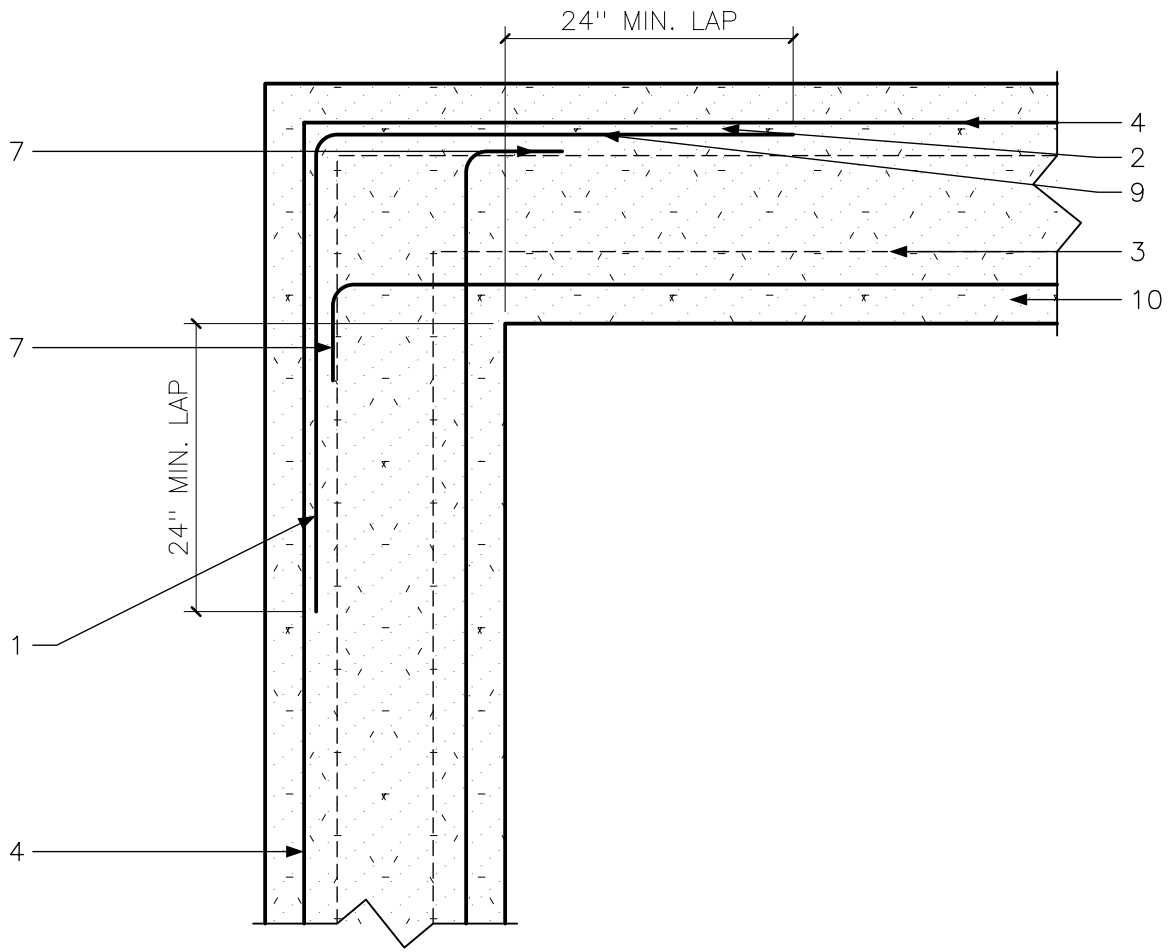


DETAIL NOTES

1. CORNER BARS TO MATCH SIZE AND SPACING OF HORIZ. REINF.
2. LAP PER LAP SPLICE SCHEDULE S-00.02, CLASS B TENSION LAP, 24" MIN.
3. CONC. STEM WALL, WALL OR FTG. PER PLAN
4. CONT. HORIZ. REINF. PER SCHEDULE
7. HOOK INSIDE FACE BARS AT OUTSIDE FACE W/ STD. 90 DEG. HOOK
9. CORNER BARS AT TOP AND BOTT. BARS WHERE TOP BARS OCCUR
10. CONT. FTG. PER PLAN

D

FOOTING CORNER (TOP AND BOTT. BARS)

SCALE: 3/4" = 1'-0"

DETAIL	PROJECT	SCALE	DRAWN	DATE	DETAIL NO
FOOTING CORNER (TOP AND BOTT. BARS)		3/4" = 1'-0"	KERF TEST (MASS S-00-01, ISSUE #7)		D