


SIMPSON CS16 STRAP X 22"  
(11" EA. SIDE OF JOINT) OVER  
TOP OF PLATE & BEAM W/ (20)  
10D X 2 1/2" EA. SIDE,  
INSTALL PER MFR. (IRC  
R602.3.2)\*

DBL. 2X4 TOP PLATE,  
INTERRUPTED AT BEAM  
OFFSET TOP PLATE END JOINTS  
24" MIN. AWAY FROM BEAM (IRC  
R602.3.2)\*

2X4 STUDS @ 16" O.C.  
(2) 2X4 KING STUDS, END NAIL  
TO BEAM W/ (4) 16D (IRC  
R602.7.5)\*

(2) 2X4 JACK STUDS

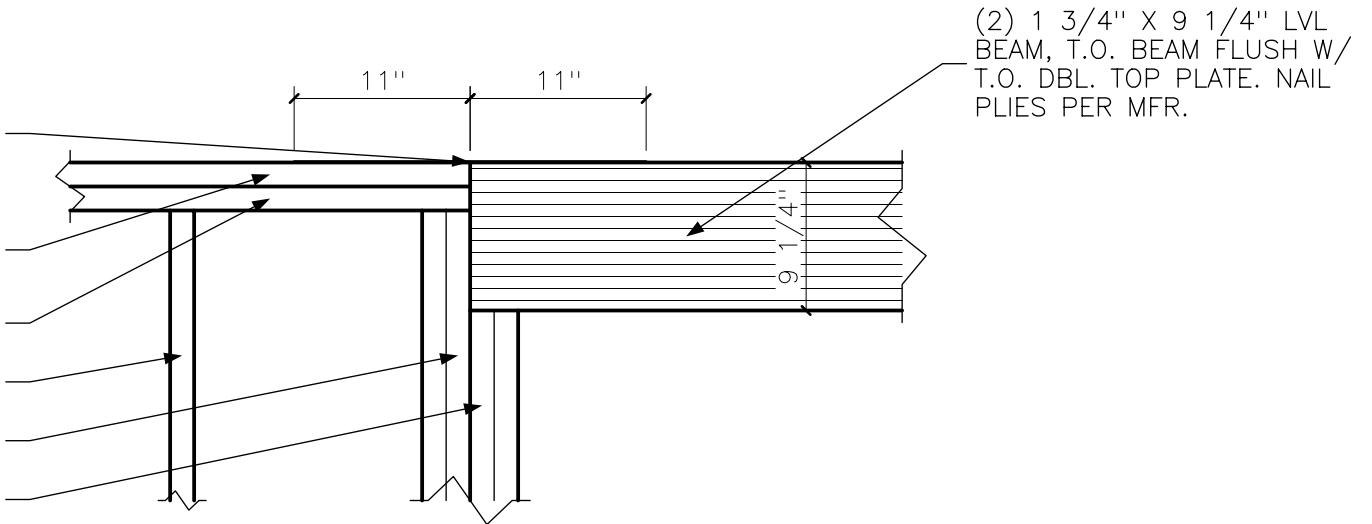

## FLUSH BEAM AT TOP PLATE – ELEVATION

SCALE: 1" = 1'-0"

DETAIL

PROJECT

SCALE

DRAWN

DATE

DETAIL NO

FLUSH BEAM AT TOP PLATE – ELEVATION

1" = 1'-0"

KERF REFERENCE

2026-10-05

1/S-502