
DETAIL NOTES

1. PLYWOOD WALL SHEATHING PER THE G.S.N. & SHEAR WALL PLAN
2. 2X6 WOOD STUDS PER PLAN @ 16" O.C. MAX.
3. CONC. SLAB
4. CONC. FOOTING
5. (2) #4 CONT. U.N.O.
6. CONC. STEM WALL
7. #4 DOWELS @ 48" O.C., ALTERNATE BENDS
8. FINISHED GRADE
9. 4" GRAVEL BASE
10. EXPANSION JOINT MATERIAL PER ARCH'L
11. 'J' WEEP SCREED PER ARCH'L
12. 2X6 P.T. SILL PLATE W/ 1/2" DIA. X 10" ANCHOR BOLTS @ 48" O.C. U.N.O., 12" MAX. FROM PLATE ENDS

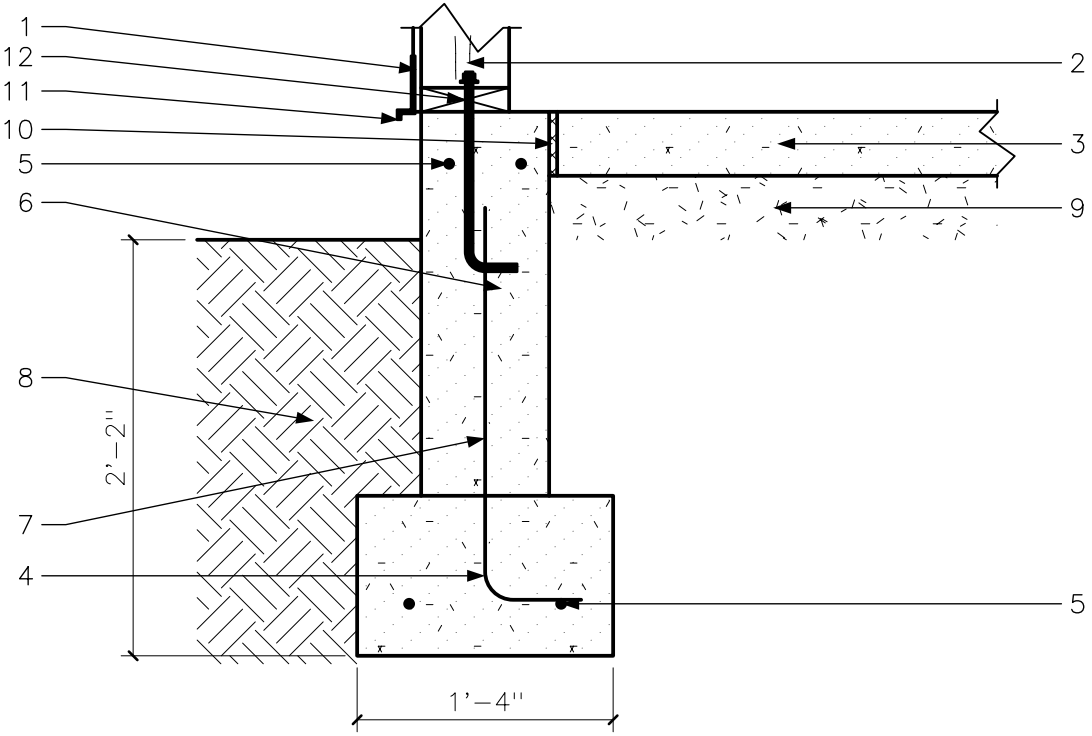


111

# EXT. WOOD STUD WALL FOOTING

SCALE: 1" = 1'-0"

| DETAIL | PROJECT | SCALE | DRAWN | DATE | DETAIL NO |
|---|---|---|---|---|---|
| EXT. WOOD STUD WALL FOOTING | | 1" = 1'-0" | KERF REFERENCE | | 111 |