
HEADER SCHEDULE NOTES

1. 8'' CONC. STEM WALL
2. 16'' X 12'' CONC. FTG.
3. HEADERS PER SCHEDULE U.N.O.

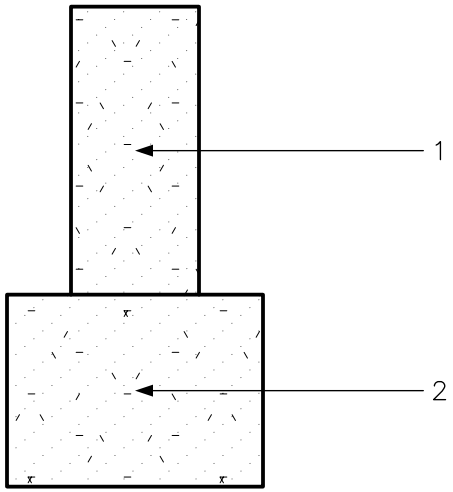

HEADER SCHEDULE

OPENING WIDTH	HEADER	JACK STUDS
0'–0'' TO 4'–0''	(2) 2X6	1
4'–1'' TO 6'–0''	(2) 2X8	2
6'–1'' TO 8'–0''	(2) 2X12	2

2 STEM WALL W/ HEADER SCHEDULE

SCALE: 1'' = 1'–0''

DETAIL	PROJECT	SCALE	DRAWN	DATE	DETAIL NO
STEM WALL W/ HEADER SCHEDULE		1'' = 1'–0''	KERF		2