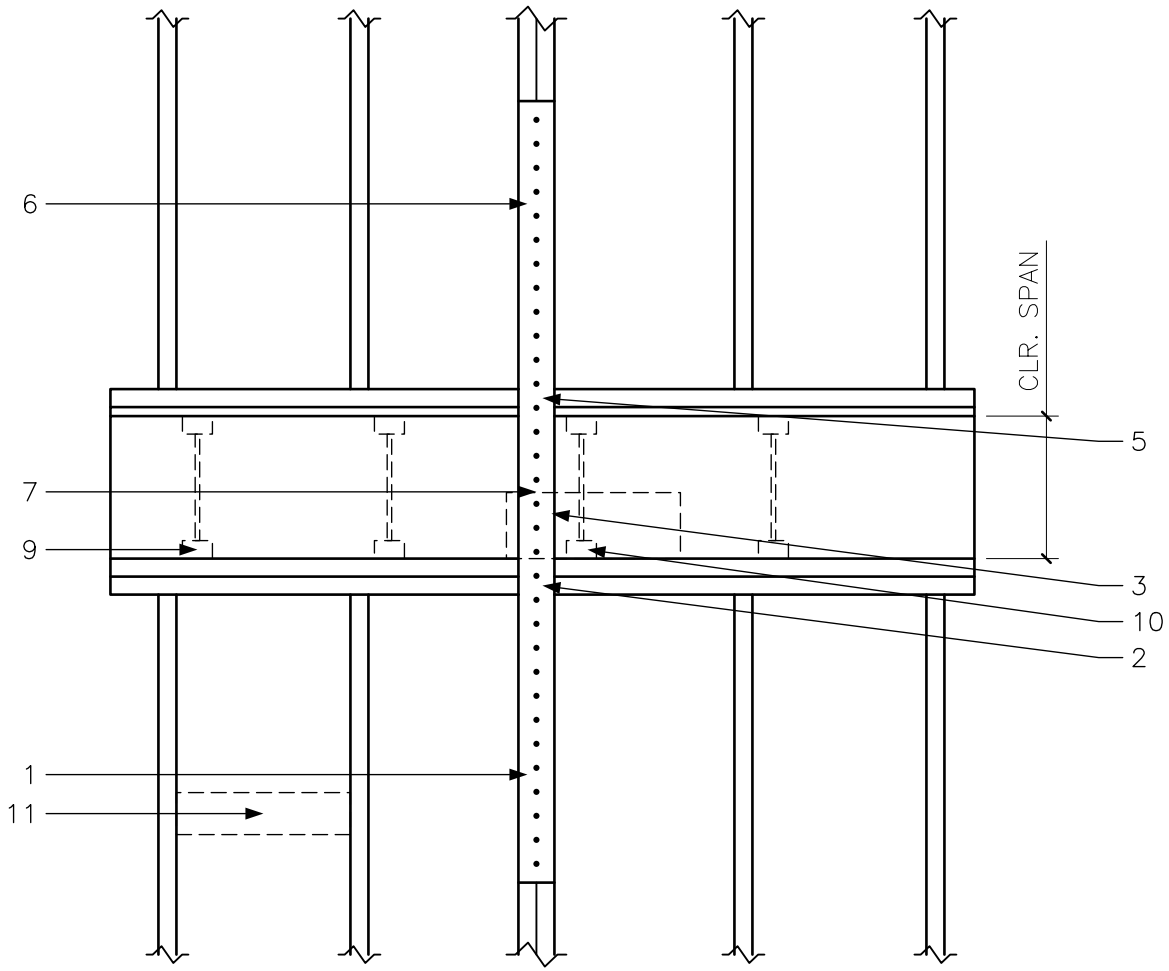



DETAIL NOTES

1. (2) 2X6 POST BELOW PER PLAN
2. DBL. 2X6 TOP PLATE
3. 1 1/4" LSL RIM BOARD
5. 2X6 SOLE PLATE PER SHEAR WALL SCHEDULE
6. (2) 2X6 POST ABOVE PER PLAN
7. SIMPSON CMST14 STRAP HOLDOWN PER HOLDOWN SCHEDULE, FASTENERS PER SCHEDULE
9. FLOOR JOISTS PERPENDICULAR TO WALL BEYOND
10. ALT. SOLID BLOCKING (WHERE OCCURS)
11. 2X4 BLOCKING BEYOND

A

## STRAP OVER FLOOR JOISTS PERPENDICULAR TO WALL

SCALE: 3/4" = 1'-0"

| DETAIL | PROJECT | SCALE | DRAWN | DATE | DETAIL NO |
|---|---|---|---|---|---|
| STRAP OVER FLOOR JOISTS PERPENDICULAR TO WALL | | 3/4" = 1'-0" | KERF | | A |