
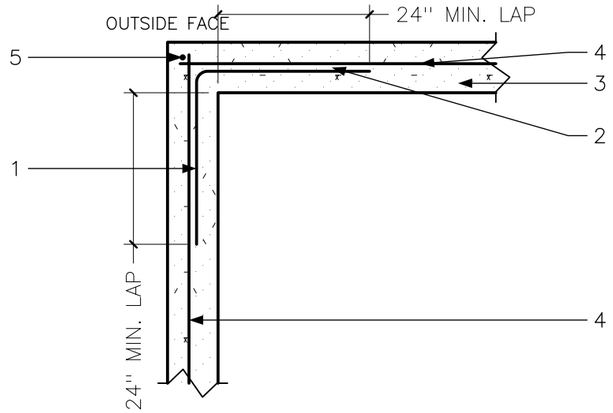


A SINGLE MAT CORNER

SCALE: 1/2" = 1'–0"

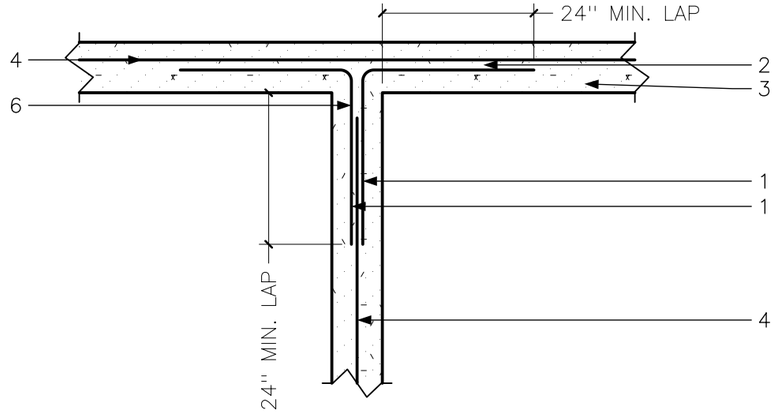


B SINGLE MAT T–INTERSECTION

SCALE: 1/2" = 1'–0"


DETAIL NOTES

1. CORNER BARS TO MATCH SIZE AND SPACING OF HORIZ. REINF.
2. LAP PER LAP SPLICE SCHEDULE S–00.02, CLASS B TENSION LAP, 24" MIN.
3. CONC. STEM WALL, WALL OR FTG. PER PLAN
4. CONT. HORIZ. REINF. PER SCHEDULE
5. WALL VERT. REINF. AT CORNER, SIZE TO MATCH WALL VERT.
6. ALTERNATE CORNER BAR BEND DIRECTION AT EA. LAYER
7. HOOK INSIDE FACE BARS AT OUTSIDE FACE W/ STD. 90 DEG. HOOK
8. BARS EA. FACE WHERE DOUBLE MAT OCCURS
9. CORNER BARS AT TOP AND BOT. BARS WHERE TOP BARS OCCUR
10. CONT. FTG. PER PLAN

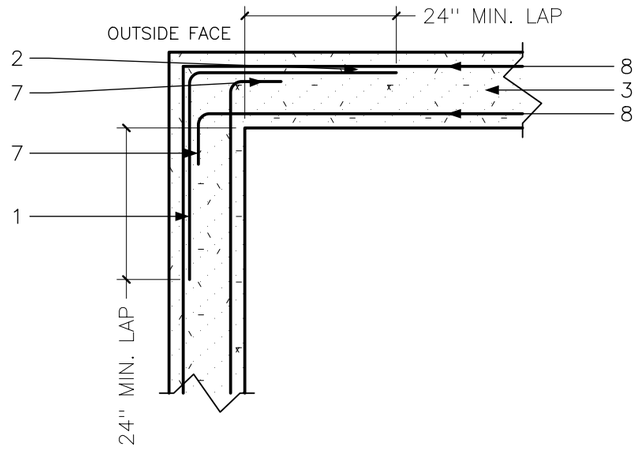

C DOUBLE MAT CORNER (BARS EA. FACE)

SCALE: 1/2" = 1'–0"

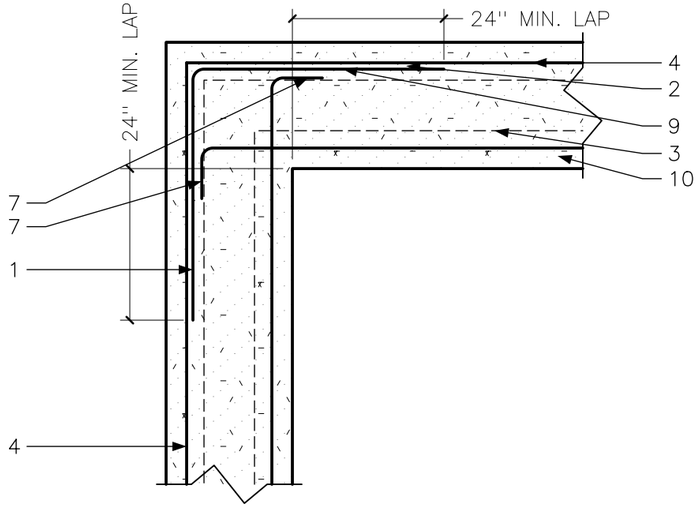

D FOOTING CORNER (TOP AND BOT. BARS)

SCALE: 1/2" = 1'–0"

DETAIL	PROJECT	SCALE	DRAWN	DATE	DETAIL NO
CORNER AND INTERSECTION REINFORCING IN FOOTINGS, STEM WALLS AND CONCRETE WALLS		1/2" = 1'–0"	KERF TEST (MASS S–00–01, ISSUE #7)		